Product Data Sheet

LKRA-VPA 101K-GS12

Light duty swivel castor, with bolt hole fitting, with threaded pin, wheel, with solid rubber tyres, with synthetic rim



EAN 4047526304263
ID 304261
Customs tariff number 87169090

Made in Germany

Bracket: LKRA series
- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: VPA series
- tyre: high-quality solid rubber, hardness 80 Shore A, colour grey, non-marking, non-staining
- rim: high-quality nylon 6 or polypropylene in the electrically conductive version "-EL", impact resistant, colour black

Other features:
- high chemical resistance to many aggressive substances, except oils
- operating temperature: -20 °C to +60 °C, reduced load capacity over +30 °C

Technical data:


Wheel Ø (D)		100 mm
Wheel width		32 mm
Load capacity at 3 km/h		110 kg
Load capacity (static)		275 kg
Bearing type		ball bearing
Total height (H)		133 mm
Mounting type		threaded pin
Pin length		30 mm
Thread		M12
Offset (F)		40 mm
Temperature resistance min		-20 °C
Temperature resistance max		60 °C
Tread and tyre hardness		80 Shore A
Unit weight		0.7 kg
Non-marking		✓
Non-staining		✓
Antistatic		✗
ESD		✗
Electrically conductive		✗
Corrosion-resistant		✗
Heat-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗


Tread and tyre hardness
80 Shore A

Rolling resistance
good

Wear resistance
sufficient

Operating noise / floor surface preservation
very good

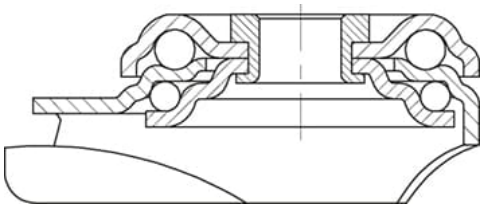



Product references



Corresponding standard locking LKRA-VPA 101K-FI-GS12



Corresponding fixed castor BKRA-VPA 101K



Wheel used VPA 101/8K