Product Data Sheet

LPA-PATH 75G

Light duty swivel castor, with top plate fitting, wheel, with thermoplastic polyurethane tread, with nylon wheel centre

EAN 4047526106195
ID 757089
Customs tariff number 83022000

Made in Germany



Bracket: LPA series
- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: PATH series
- tread: high-quality thermoplastic polyurethane (TPU), hardness 94 Shore A, colour dark grey, non-marking, non-staining
- wheel centre: high-quality nylon 6, impact resistant, colour silver grey

Other features:
- very high chemical resistance to many aggressive substances
- operating temperature: -25 °C to +70 °C, temporarily up to +90 °C, reduced load capacity over +35 °C

Technical data:


Wheel Ø (D)		75 mm
Wheel width		25 mm
Load capacity at 3 km/h		75 kg
Load capacity (static)		190 kg
Bearing type		plain bore
Total height (H)		100 mm
Mounting type		top plate
Plate size		60 x 60 mm
Bolt hole spacing		38 x 38 / 48 x 48 mm
Bolt hole Ø		6.2 mm
Offset (F)		29 mm
Temperature resistance min		-25 °C
Temperature resistance max		70 °C
Tread and tyre hardness		94 Shore A
Unit weight		0.3 kg
Non-marking		✓
Non-staining		✓
Antistatic		✗
ESD		✗
Electrically conductive		✗
Corrosion-resistant		✗
Heat-resistant		✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗


Tread and tyre hardness
■■■■□ 94 Shore A

Rolling resistance
■■■■□ very good

Wear resistance
■■■■□ very good

Operating noise / floor surface preservation
■■■□□ good

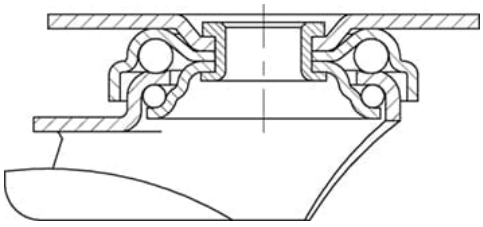



Suitable for machine washing		✕

Product references



Corresponding standard locking LPA-PATH 75G-FI



Corresponding fixed castor BPA-PATH 75G



Wheel used PATH 75/8G