Product Data Sheet

LPA-POA 75G

Light duty swivel castor, with top plate fitting, nylon wheel

EAN 4047526275594
ID 275594
Customs tariff number 83022000

Made in Germany



Bracket: LPA series
- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: POA series
- high-quality nylon 6, impact resistant, hardness 70 Shore D, colour black

Other features:
- high chemical resistance to many aggressive substances
- operating temperature: -25 °C to +80 °C, reduced load capacity over +35 °C

Technical data:


Wheel Ø (D)		75 mm
Wheel width		23 mm
Load capacity at 3 km/h		75 kg
Load capacity (static)		190 kg
Bearing type		plain bore
Total height (H)		100 mm
Mounting type		top plate
Plate size		60 x 60 mm
Bolt hole spacing		38 x 38 / 48 x 48 mm
Bolt hole Ø		6.2 mm
Offset (F)		29 mm
Temperature resistance min		-25 °C
Temperature resistance max		80 °C
Tread and tyre hardness		70 Shore D
Unit weight		0.2 kg
Non-marking		✓
Non-staining		✓
Antistatic		✗
ESD		✗
Electrically conductive		✗
Corrosion-resistant		✗
Heat-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗


Tread and tyre hardness
■■■■■ 70 Shore D

Rolling resistance
■■■■■ excellent

Wear resistance
■■■□□ good

Operating noise / floor surface preservation
■■□□□ satisfactory

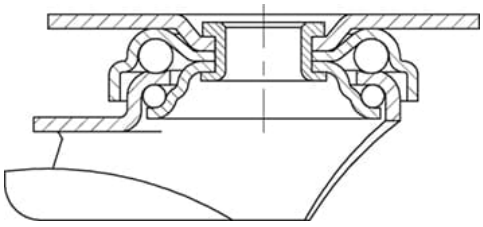



Product references



Corresponding standard locking LPA-POA 75G-FI



Corresponding fixed castor BPA-POA 75G



Wheel used POA 75/8G